



## Glass Door Refrigerators Bottom Mount Compressor Single and Double Door Series

KBSR-1G | KBSR-2G

### Durable Design

- Stainless steel interior & exterior
- Coated evaporator coil
- Height adjustable, heavy duty, PE coated wire shelves
- LED interior lighting
- Digital temperature display
- Door lock with keys
- Simple plug-in installation
- Oversized bottom mount compressor section

### Energy Efficient

- Self-closing door with stay open feature
- Seals tight with magnetic vinyl gasket
- Open door alert beeps when door has been open for 3 minutes
- Foamed-in place high-density polyurethane insulated body, CFC-free
- Large evaporator & condenser for quick cooling and greater efficiency
- Bottom mount compressor provides energy savings and ease of service

### Superior Quality

- Designed for mobility, reliability & efficiency in commercial kitchens
- Certified with ETL guaranteeing quality standards
- 4" swivel castors with 2 front brakes
- Easy grip handle(s)
- Entirely self-contained system
- Automatic defrost system
- Digitally controlled temperature system
- Accommodates full-size bun sheet pans
- Easily adjustable shelf height
- NEMA 5-15 plug
- R290 Natural Refrigerant
- Holding temperature: Refrigerator 33°F to 39°F



Nema 5-15P  
Dedicated Circuit

Project Name:	
Location:	
Item:	Qty:
Model:	




5659 Royalmount Ave.  
Montreal, QC, Canada H4P 2P9  
Telephone: 514.737.9701 / Toll Free: 888.275.4538  
Fax: 514.342.3854 / Toll Free: 877.453.8832  
sales@mvpgroupcorp.com / mvpgroupcorp.com

12000 Biscayne Blvd., Suite # 108  
Miami, FL, United States 33181  
Telephone: 786.600.4687 / Toll Free: 844.218.8477  
Fax: 786.661.4100



## Glass Door Refrigerators Bottom Mount Compressor Single and Double Door Series

KBSR-1G | KBSR-2G

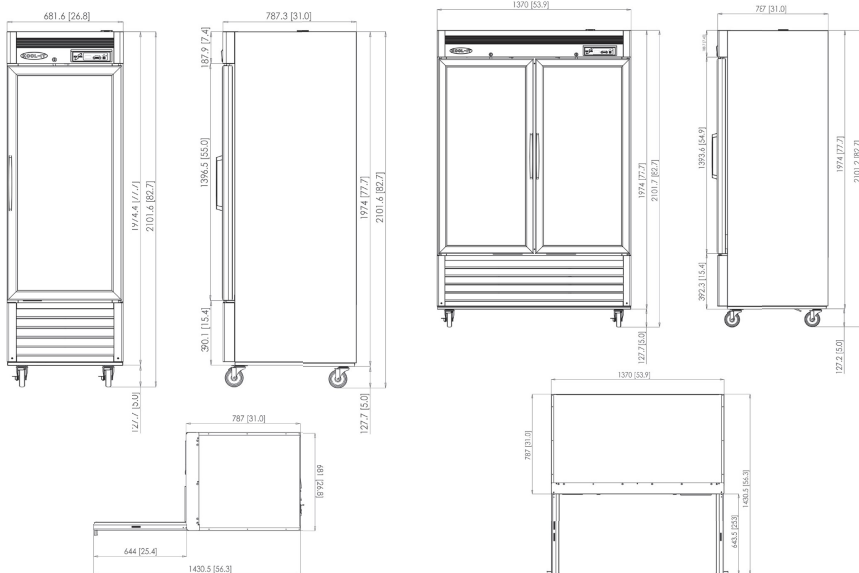

MODEL NUMBER	# OF DOORS	# OF SHELVES	CAPACITY (cubic feet)	EXTERNAL DIMS (IN) W x D x H	VOLTAGE / FREQUENCY	COMPRESSOR	AMPS	REFRIGERANT	SHIPPING DIMS (IN) W x D x H	SHIP WEIGHT (LBS)
KBSR-1G	1	3	21	26.8 x 31.0 x 82.6	115/60-1	1/4	2.0	R-290	28.3 x 34.1 x 83	304
KBSR-2G	2	6	44	53.9 x 32.75 x 82.6	115-60/1	1/2	5.6	R-290	55.5 x 34.1 x 83	489



Nema 5-15P  
Dedicated Circuit

These units are designed for maximum performance in an air-conditioned area of 75°F ambient temperature and 55% relative humidity. There must be adequate ventilation at the top, sides & rear of the unit for proper operation.

Warranty: 36 months parts and labor.  
Additional 24 months on compressor (part only)

KOOL-IT is a registered trademark of MVP Group. Specifications subject to change without notice.



5659 Royalmount Ave.  
Montreal, QC, Canada H4P 2P9  
Telephone: 514.737.9701 / Toll Free: 888.275.4538  
Fax: 514.342.3854 / Toll Free: 877.453.8832  
sales@mvpgroupcorp.com / mvpgroupcorp.com

12000 Biscayne Blvd., Suite # 108  
Miami, FL, United States 33181  
Telephone: 786.600.4687 / Toll Free: 844.218.8477  
Fax: 786.661.4100