



ELECTRIC SHUTTER



REAR LOADING

## MODELS

KGL-RS-(40, 60)-S

KGL-RS-(40, 60)-R

## GRAB-N-GO LOW PROFILE CASE FRONT AND REAR LOADING, ELECTRIC SHUTTER

CASE HOLDS 38°F TO 40°F • FORCED AIR REFRIGERATION • OPEN FRONT  
FRONT AND REAR LOADING • KEY OPERATED ELECTRIC SHUTTER • TEMPERATURE RECORDER



AVAILABLE WITH A BLUE DECAL  
\*CONTACT OUR SALES DEPARTMENT FOR MORE INFORMATION



AUTODESK  
REVIT®



GRAB-N-GO LOW PROFILE CASE  
FRONT AND REAR LOADING ELECTRIC SHUTTER

SELF CONTAINED	Model	O.A. Length (inches)	Volume FT <sup>3</sup>	Electrical 115 Volts					NEMA 115 V Plug	Weight lbs		Crate Size (inches)		
				Compressor		LIGHTS Fans HTRS	EVAP Pan	Total Amps		No Crate	With Crate	L"	W"	H"
				H.P	F.L.A									
	KGL-RS-40-S	41	12.98	5/8	8.9	1.29	6.7	16.8	5-20P	419	585	44	39	74
	KGL-RS-60-S	60.6	19.85	3/4	16	2.35	6.7	25	HW	510	750	64	39	74

REMOTE	Model	O.A. Length (inches)	115 Volts Total Amps	B.T.U	Weight lbs	
					No Crate	With Crate
KGL-RS-60-R	60.6	1.4	5835	430	635	

HW = Hard wired  
Remote cases are hard wired

**SPECIAL FEATURES**

Locking back doors for rear loading  
Key operated electric shutter

**STANDARD FEATURES**


Silver colored PVC coated steel front panel with a silver decal  
CFC free injected foam insulation  
PVC coated steel gray interior  
Dark Gray anthracite kick plate  
Foamed polystyrene black end panels  
Tempered side glass  
LED lighting in canopy and under shelves  
Temperature and defrost regulated by a digital controller  
Removable condensate evaporating pan for easy cleaning  
Product stops on all shelves  
Height adjustable, shelves can be tilted  
Levelling feet

**OPTIONAL FEATURES**

Graphics on upper and lower front panels  
Stainless steel exterior and / or interior  
Other colors available  
Additional shelves  
Price tag molding  
Product dividers  
Condensate evaporating pan for remote cases  
KGL-RS caster kit for self contained units only

**WARRANTY**

One year parts and labor with an additional four years on the compressor (part only)

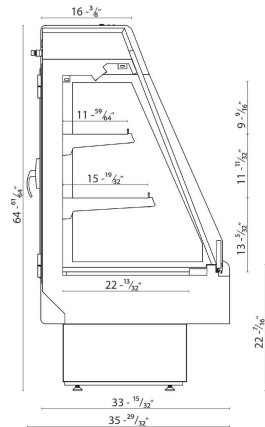

**NOTE**

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U's are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 6.7 amps added to the amp load. Remote cases must be hard wired – no plugs.

Tel: 786.600.4687 / Toll Free: 844.218.8477  
Fax: 786.661.4100  
 Tel: 514.737.9701 / Toll Free: 888.275.4538  
Fax: 514.342.3854 / toll free: 877.453.8832  
sales@mvpgroupcorp.com / mvpgroupcorp.com



Hydra - Kool is a registered trademark of MVP Group Corp.  
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE