

# BACK BAR COOLER SWINGING GLASS DOOR

## MODEL: DBB48-H2

Model:	DBB48-H2
Rated Voltage:	115V AC
Rated Frequency:	60Hz
Total Input Power:	284W
Total Current:	2.66A
Total Capacity:	11.23 cu ft
Refrigerant:	R290/3.17oz
Climatic Category:	4/5
Protection Type	I
Design pressure	High Side :385PSIG Low Side:150PSIG
Insulation Blowing Gas	C-pentane
Net Weight:	198 lbs
NEMA Cofig.	5-15P

## STANDARD FEATURES

### SIDE MOUNT COMPRESSOR

the side mount compressor structure is placed in a easy access area, provides quick and convenient access

### HIGH QUALITY STEEL

interior and exterior uses high-quality steel minimizes dents, scratches and rust

### HIGH DENSITY POLYURETHANE INSULATION CFC

free and high density cell foam is Eco-friendly and more energy efficient

### STURDY, CLEAN STAINLESS SHELVING

high quality coated stainless shelves prevents peel and rust.

### SELF-CLOSING DOOR SYSTEM

door Automatically close at 60°

REFRIGERATORS OPERATE AT  
33 °F - 38 °F




NEMA 5-15P  
115/60/1

## PLAN VIEW

FRONT VIEW



SIDE VIEW

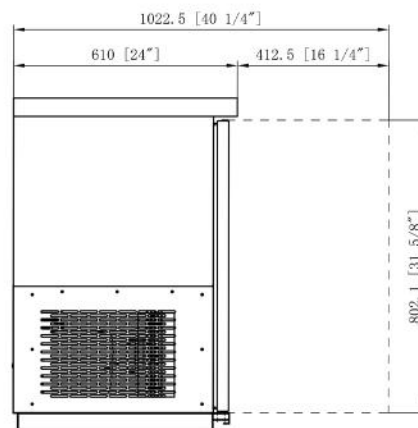

## MODEL: DBB48-H2

### Features and Benefits

- \*High Resistance to Dust, high quality condenser
- \* R290 Natural Refrigerant, promotes faster cool down and efficient energy consumption
- \* 2-year parts and labor, 5-year compressor warranty
- \* Stainless steel top, sealed interior floors and rounder cabinet corners for easy cleaning
- \* Adjustable, heavy duty shelves



### Technical Specifications

Voltage/Frequency	115V 60Hz
Refrigerant	R290
Type of Defrost	Automatic
Exterior Finish	Stainless steel
Interior Finish	Stainless steel
Net Weight	198lbs
Total Capacity	11.23 cu ft
Total Current	2.66A
Climatic Category	4/5
Nema Config.	5-15P



MODEL NO	TEMPERATURE RANGE ( ° F )	EXTERNAL DIMENSION WXDXH(INCHES)	PACKING,CARTON WXDXH(INCHES)	DOOR	40GP CONTAINER CERTIFICATION
DBB48-H2	33°- 38° F	49¼ X 24 X 35⅞	51⅞ X 26⅞ X 43¼	2	54