



**Toll Free Number:** 1 (800) 931-8628



**Email:** Info@dukersusa.com



**Website:** www.dukersusa.com

## MODEL: DSM-33R

### Features and Benefits

- \* Digital temperature control features, a digital display to make monitoring interior temperature a breeze
- \* 2-year parts and labor, 5-year compressor warranty
- \* Auto defrost function, which ensures optimal performance day-in and day-out
- \* Interior LED Lighting on the right side to always show your products at their best
- \* Anti-fogging tempered glass door helps ensure a crystal clear view of the interior

### Technical Specifications

Voltage/Frequency 115V/60Hz

Refrigerant R290

Type of Defrost Automatic

Exterior Finish Stainless steel

Interior Finish Stainless steel

Net Weight 339lbs

Total Capacity 33.30 cu ft

Total Current 3.8A

Climatic Category 4/5

Nema Config. 5-15P



MODEL NO	TEMPERATURE RANGE (°F )	EXTERNAL DIMENSION WXD XH(INCHES)	PACKING,CARTON WXD XH(INCHES)	DOOR	40GP CONTAINER CERTIFICATION
DSM-33R	32°F ~ 50°F	39 <sup>3</sup> / <sub>8</sub> " X 31 <sup>7</sup> / <sub>8</sub> " X 79 <sup>1</sup> / <sub>2</sub> "	40 <sup>3</sup> / <sub>4</sub> " X 33 <sup>1</sup> / <sub>4</sub> " X 81 <sup>3</sup> / <sub>8</sub> "	2	28

# UPRIGHT SHOWCASE MERCHANDISER

## MODEL:DSM-33R

Model:	DSM-33R
Rated Voltage:	115V AC
Rated Frequency:	60Hz
Total Input Power:	430W
Total Current:	3.8A
Total Capacity:	33.55 cu ft
Refrigerant:	R290/5.11oz
Climatic Category:	4/5
Protection Type	I
Design pressure	High Side :300PSIG Low Side:150PSIG
Insulation Blowing Gas	C-pentane
Net Weight:	339 lbs
NEMA Config	5-15P

## STANDARD FEATURES

### BOTTOM MOUNT COMPRESSOR

bottom mount compressor structure is placed in the coolest possible area, provides quick and easy service

### HIGH QUALITY STEEL

interior and exterior uses high-quality steel to minimizes dents, scratches and rust

### HIGH DENSITY POLYURETHANE INSULATION CFC

free and high density cell foam is Eco-friendly and more energy efficient

### STURDY, CLEAN STAINLESS SHELVING

high quality coated stainless shelves prevents peel and rust.

### SELF-CLOSING DOOR SYSTEM

door Automatically close at 60°

### MERCHANDISERS OPERATE AT

32 °F - 50 °F




NEMA 5-15P


115/60/1

## PLAN VIEW

FRONT VIEW

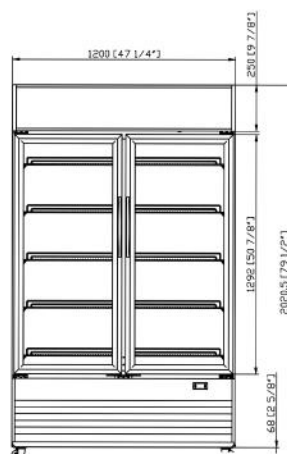

SIDE VIEW

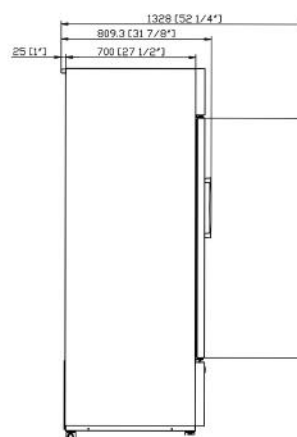

**AQ** AutoQuotes

 **Dukers®**  
www.dukersusa.com

**California Office**  
2488 Peck Road,  
City of Industry, CA 90601  
(562) 568-4060  
www.dukersusa.com

**New Jersey Office**  
475 S Clinton Ave  
South Plainfield, NJ 07080  
(800) 608-9289  
Info@dukersusa.com

**Georgia Office**  
6513 Warren Dr  
NW Norcross, GA 30093  
(678) 580-3960  
service@dukersusa.com

**Texas Office**  
1444 N Cockrell Hill Rd  
#104 Dallas, TX 75211  
(469) 421-1040  
Warrenty@dukersusa.com