

UPRIGHT SHOWCASE MERCHANTISER

MODEL: DSM-40SR

Model:	DSM-40SR
Rated Voltage:	115V AC
Rated Frequency:	60Hz
Total Input Power:	690W
Total Current:	9.2A
Total Capacity:	33.30 cu ft
Refrigerant:	R290/5.11oz
Climatic Category:	4/5
Protection Type	I
Design pressure	High Side :300PSIG Low Side:150PSIG
Insulation Blowing Gas	C-pentane
Net Weight:	363 lbs
NEMA Config	5-15P

STANDARD FEATURES

BOTTOM MOUNT COMPRESSOR

bottom mount compressor structure is placed in the coolest possible area, provides quick and easy service

HIGH QUALITY STEEL

interior and exterior uses high-quality steel to minimize dents, scratches and rust

HIGH DENSITY POLYURETHANE INSULATION CFC

free and high density cell foam is Eco-friendly and more energy efficient

STURDY, CLEAN STAINLESS SHELVING

high quality coated stainless shelves prevents peel and rust.

SELF-CLOSING DOOR SYSTEM

door Automatically close at 60°

MERCHANTISERS OPERATE AT

32 °F - 50 °F




NEMA 5-15P


115/60/1

PLAN VIEW

FRONT VIEW

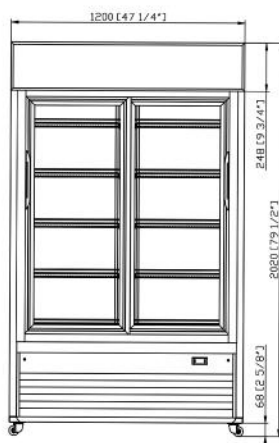

SIDE VIEW

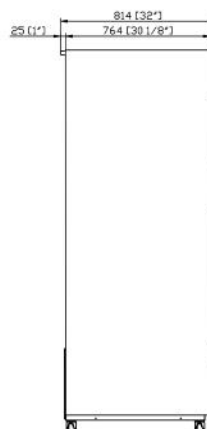

California Office
2488 Peck Road,
City of Industry, CA 90601
(562) 568-4060
www.dukersusa.com

New Jersey Office
475 S Clinton Ave
South Plainfield, NJ 07080
(800) 608-9289
info@dukersusa.com

Georgia Office
6513 Warren Dr
NW Norcross, GA 30093
(678) 580-3960
service@dukersusa.com

Texas Office
1444 N Cockrell Hill Rd
#104 Dallas, TX 75211
(469) 421-1040
Warrenrty@dukersusa.com

MODEL: DSM-40SR

Features and Benefits

- * Digital temperature control features, a digital display to make monitoring interior temperature a breeze
- * 2-year parts and labor, 5-year compressor warranty
- * Auto defrost function, which ensures optimal performance day-in and day-out
- * Interior LED Lighting on the right side to always show your products at their best
- * Anti-fogging tempered glass door helps ensure a crystal clear view of the interior



Technical Specifications

Voltage/Frequency	115V/60Hz
Refrigerant	R290
Type of Defrost	Automatic
Exterior Finish	Black
Interior Finish	White
Net Weight	363 lbs
Total Capacity	33.30 cu ft
Total Current	9.2A
Climatic Category	4/5
Nema Config.	5-15P



MODEL NO	TEMPERATURE RANGE (°F)	EXTERNAL DIMENSION WXD X H (INCHES)	PACKING CARTON WXD X H (INCHES)	DOOR	40GP CONTAINER CERTIFICATION
DSM-40SR	32°F ~ 50°F	47¼" X 32" X 79½"	48⅝" X 33¾" X 81⅝"	2	23