

4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project :		
Model #:		
Item #:	Qty:	
Available W/H :		
Approval :		

# Pass Thru Half Solid Door Heated Cabinet

Pass-Thru PRO Series

Model: PRO-50-4H-PT-AL(-AR)

# \_\_\_ FEATURES & BENEFITS =\_\_

# ■ Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- · Alarm beeps when doors are not sealed.
- Early warning alarm program detects issues before malfunction occurs.
- · Digital display allows for easy monitoring.
- Sensitive touch display.

# ■ Ducted fan air distribution system

Maintains temperature within the food zone

#### On/Off switch

ON/OFF switch is located on control panel

#### ■ All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a 22 gauge stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

# Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

#### ■ LED interior lighting

# ■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

- Half length stainless steel solid doors with locks
- Self-closing doors with stay open feature at 120 degrees
- Heated cabinet holds 140°F ~ 180°F for the best in food preservation
- Lifetime guaranteed heavy duty hinges and handles

• PRO-50-4H-PT: Right hinged + Left hinged

• PRO-50-4H-PT-AL: All Left hinged

• PRO-50-4H-PT-AR: All Right hinged











PRO-50-4H-PT-AL(-AR)	8	48.7	6	3000	15	567	513/4 x 361/4 x 78
Model	Swing Door	CU./FT.	#of Shelves	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D*x H † (inches)

(unit: inch)

# Model: PRO-50-4H-PT-AL(-AR)

ELECTRICAL DATA					
Voltage	208/115/60/1				
Plug Type	⊙NEMA L14-20P				
Full Load Amperes	15				
Wattage (W)	3000				
Feed Wires with Ground	4				
Cord Length (ft.)	8				
DIMENSIONAL DATA					
# of Doors	8				
# of Racks Accepted	2				
Net Capacity (cu. ft.)	48.7				
Ext. Length Overall (in.)	513/4 (1314mm)				
Ext. Depth Overall (in.)*	361/4 (920mm)				
Ext. Height Overall (in.)†	78 (1982mm)				
Int. Length Overall (in.)	421/4 (1073mm)				
Int. Depth Overall (in.)	275/8(702mm)				
Int. Height Overall (in.)	583/4 (1493mm)				
# of Shelves	6				
Shelf Size (L x D) (in.)	223/4 x 263/8				
Net Weight (lbs.)	499				
Gross Weight (lbs.)	567				

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

# ■ WARRANTY: 3 Year Parts and Labor Warranty


# STANDARD FEATURES


- · Door locks standard
- Standard 4" dia. swivel casters with locks on the front set
- · Easy replaceable one piece magnetic door gaskets
- · Solid and sturdy grille design
- \*\* Lead time applies. Please contact your sales representative for more details to order.

#### OPTIONAL ACCESSORIES

- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: (L, R) H50R901700
- · Half door bun tray rack: TSP-2224 (each holds up to six 18"L x 26"D sheet pans)
- Tray slides kits: TS23-N1LR(#1), TS23-N4LR(#4), TS23-UNLR-H(Universal)
- (1) Pair of #1 Tray Slides: H26R104460
- (1) Pair of Universal Tray Slides: H26R104470

# **PLAN VIEW**



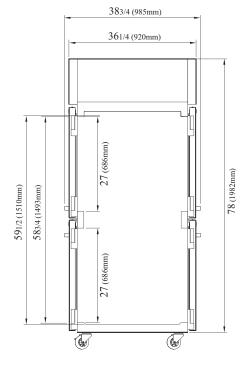

SIDE VIEW

■ **Turbo Air**: 800-627-0032 ■ **GK**: 800-500-3519

■ Warranty: 800-381-7770 ■ AC: 888-900-1002

Ver 20200420



















<sup>\*</sup> Depth does not include 2-1/4" for door handles.

<sup>†</sup> Height does not include 5" for caster height.