

ICE MACHINE | BLUI-250A

L x D x H — 30" x 30" x 38 1/2"



Project: _____

Model#: _____

Item #: _____

Qty: _____

Available W/H: _____

Approval: _____


STANDARD FEATURES

- BLUI-250A produces up to 251 lbs. of ice daily
- BLUI-250A has 96 lbs. of built in storage capacity
- Units produce individual crescent ice cubes
- Durable stainless steel cabinet
- Stainless steel evaporator
- Removable air filter
- Digital Self Diagnostic System (power switch is accessible without panel removal)
- Environmentally friendly refrigerant (R-410A)
- Energy Star Certified

WARRANTY: 3 Years Parts and Labor
5 Years Compressor Evaporator Warranty
Valid in the Continental United States



Cube Dimensions*



*Approximate size in inches, image not to scale.

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 30 - 100 PSIG
- Voltage Range 100 - 130V

Service

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters.
- Allow 6" (15cm) clearance at rear, sides, and top for proper air circulation and ease of maintenance/service.


Plumbing

- Icemaker Water Supply Line: Minimum 3/8" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent


*BLUE AIR has the right to change specifications without further notice.

| Condenser | Model | ICE PRODUCTION | | | | Air 90°F / Water 70° F | | Min. Circuit Amperage | Voltage V/HZ/PH | Shipping Weight lbs / kg | Energy Star® |
|------------|-----------|------------------------------------|----------|-----------|-------|------------------------|----------------------------------|-----------------------|-----------------|--------------------------|--------------|
| | | Air / Water Temp Lbs. per 24 hours | | Per Cycle | | KWH per 100 lbs. | Portable Water Gal. per 100 lbs. | | | | |
| | | 70°/50°F | 90°/70°F | Lbs. | Cubes | | | | | | |
| Air-Cooled | BLUI-250A | 251 | 180 | 4.3 | 238 | 6.53 | 15 | 7 | 115V/60/1 | 178 / 81 | YES |


TOP VIEW

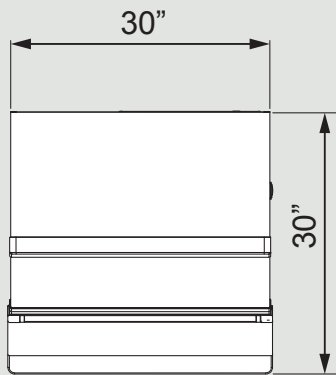

FRONT VIEW

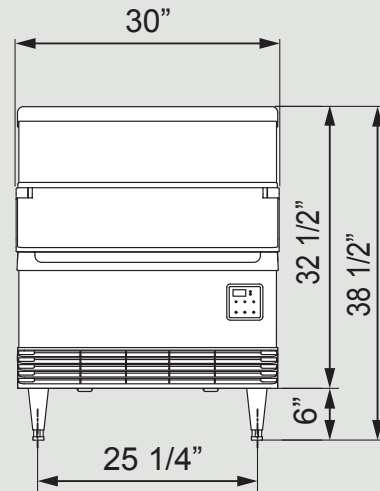

SIDE VIEW

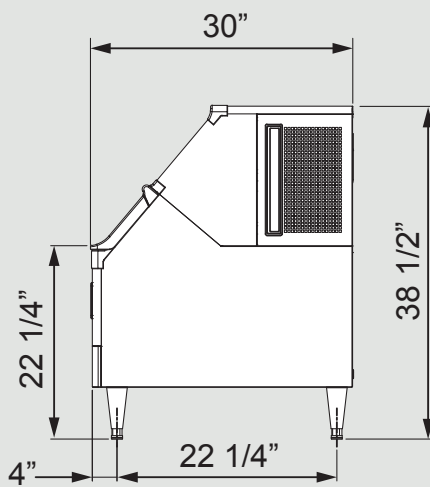

BACK VIEW

