

### **MODEL BKGM23-HC**

# GLASS DOOR MERCHANDISER

Sleek and durable cooling solution for your food and beverages.





Stainless steel cabinet construction Stainless steel interior and exterior

Stainless steel interior and exterior (galvanized steel back & bottom).

Temperature range between 33°F ~ 39°F Air guard on rear wall ensures proper air circulation and cooling.



#### **Hydrocarbon refrigerants (R-290)** Increases energy HFC refrigerants. It is safer for the environment and does not cause ozone depletion.



#### Visual and audible door open alarm

Alarm sounds when doors are not completely closed to protect against food spoilage

Cabinet Dimensions (inches/mm)				
L	D		Н	
27″ 685 mm	31 3/4" 805 mm		81 3/4" 2065 mm	
Weight (Ibs/kg)				
Net Weight 350 lbs		Ship Weight 401 lbs		

181 kg

158 kg

# **Cabinet construction**

- Black or white painted steel exterior and white painted steel interior
- High density foamed in place polyurethane insulation Environmentally safe
- Sturdy, epoxy coated wire shelves with adjustable shelving height
- 4 shelves per compartment.
- Four 4" Diameter swivel casters with front brakes standard.


# Refrigeration

- Front slding refrigeration unit allows the unit to be serviced without being moved.
- Self-contained system, bottom mounted compressor provides quick and easy maintenance.
- Epoxy coated evaporator reduces potential corrosion
- Fabric condensation









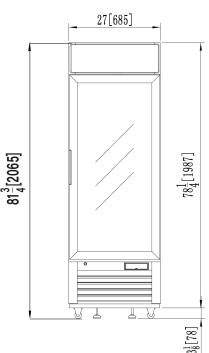

Side view



Top view



## Doors

• Self-closing doors (doors close at 90° or less)

- Automatic hold open door feature at 110°.
- Durable door gasket with easy replacement.
- Heavy duty recess door handles
- Door designed to open easily.

• Doors built with pressure and with pressure relievers to

- eliminate vacuum pressure.
- Standard door locks.
- Double pane glass

# **Design & Features**

- Digital temperature control & monitor system
- Keep food products safe by maintaining constant temperatures
- · Digital display allows for easy monitoring.
- Programs interpet the condition of refrigeration
- Controls include automatic evaporator fan motor delays

## **Optional Features &** Accessories

• 2.5" diameter casters available

- 6" adjustable legs available
- · Additional shelves are available.

Doors	1	
Capacity Cu.Ft.	23	
Shelves	4	
Refrigerant	R-290	
Temperature Range	33°F ~ 39°F	
Easy Maintenance	Sliding Condensing Unit	
Connection	9.8 ft long (3m) flexible three wire cord with modeled plug	
Lighting	LED Interior lighting	
HP	1/7+ HP	
Voltage	115V/60Hz	
Amps	2.1	
NEMA Config.	NEMA 5-15	



Blue Air has right to change specifications without further notice.





blueairfse.com

223 W. Rosecrans Ave., CA 90248 T: 310-808-0102

9 W. Shelton Terrace #A, Hillside, NJ 07205 T: 908-688-0970

orders@blueairfse.com



This product may exprose you to chemicals including Diisononyl Phthalate(DINP), which is known to the State of California to cause cancer. For more information go to www.P65War nings.ca.gov.
Ce produit peut vous exposer á des agents chimiques incluant le Diisononyl Phthalate(DINP), reconnu par l'Esat de Californie comme causant le cancer, Pour de plus amples renseignements, consulter le site www.P65Warnings.ca.gov.