

Project _____

Item Number _____

Quantity _____

SL160/SL200/SL280



SL160 / SL200 / SL280 SILVERLINE Spiral Mixers

Models:

- SL160: 210 quart (230 Liter) Spiral Mixer
- SL200: 265 quart (290 Liter) Spiral Mixer
- SL280: 370 quart (400 Liter) Spiral Mixer

Features:

- Stainless steel bowl, spiral dough hook, and shaft
- Separate bowl and agitator motors
- Has two speeds and reverse function
- Control board has separate timers for 1st and 2nd speed
- Mixer is equipped with built in castors and leveling feet for easy positioning and set-up
- Safety switches protect operator from injury if bowl lid is open
- Powerful belt drive provides low vibration, low noise, and economical maintenance for years of reliable service



Spiral Mixer

Dough Capacity:

SL160: 353lb (160kg)
SL200: 441lb (200kg)
SL280: 617lb (280kg)

Dough hook:

1st speed: 95 rpm
2nd speed: 190 rpm

Bowl:

20 rpm

Univex Corporation

Standard Accessories:

- Stainless steel bowl
- Stainless steel dough hook

Warranty:

- One year, on-site parts and labor




WE RAISE THE BAR. WE SET THE STANDARD.

SILVERLINE Spiral Mixer

SL160 / SL200 / SL280

Line drawing is the SL280

| | SL160 | SL200 | SL280 |
|---|-------------------|-------------------|------------------|
| A | 36 3/4" (93.2cm) | 38" (96.3cm) | 43" (109.1cm) |
| B | 32 1/2" (82.5cm) | 32 1/2" (82.5cm) | 32 1/2" (82.5cm) |
| C | 59 1/8" (150.1cm) | 59 1/8" (150.1cm) | 58 3/8" (148cm) |

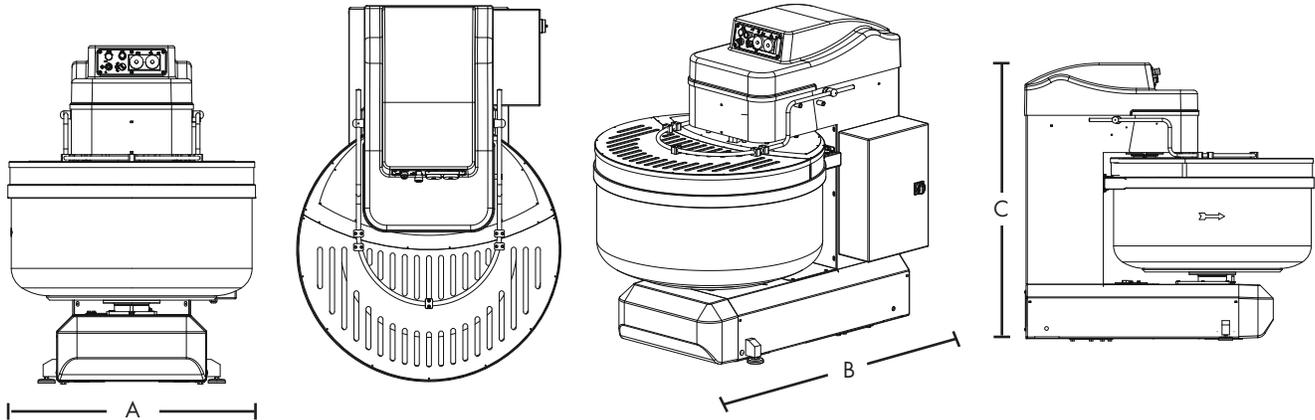

| Electrical Information | | | | | | | | |
|---------------------------|---------|-------|---------------|-------------|--------------|-------------|-----------|------------|
| Model | Voltage | Phase | Spiral hp(kW) | Bowl hp(kW) | Total hp(kW) | Spiral Amps | Bowl Amps | Total Amps |
| SL160 | 220 | 3 | 15 (11) | 1 (.75) | 16 (11.75) | 52.5 | 3.6 | 56.98 |
| SL160 Optional Voltage | 400 | 3 | 15 (11) | 1 (.75) | 16 (11.75) | 26.25 | 1.8 | 28 |
| SL200 | 220 | 3 | 15 (11) | 1 (.75) | 16 (11.75) | 52.5 | 3.6 | 56.98 |
| SL200 Optional Voltage | 400 | 3 | 15 (11) | 1 (.75) | 16 (11.75) | 26.25 | 1.8 | 28 |
| SL280 | 220 | 3 | 15 (11) | 1 (.75) | 16 (11.75) | 52.5 | 3.6 | 56.98 |
| SL280 Optional Voltage | 400 | 3 | 15 (11) | 1 (.75) | 16 (11.75) | 26.25 | 1.8 | 28 |

Plug Info:
Hard Wire With Shutoff

Transmission: Heavy duty low noise and low vibration belt drive.

Bowl Guard: Swings open for full access to bowl. Guard must be closed for mixer operation.

Controls: Control panel with digital timers. Separate timers for high and low speed. Security key for manual use. Bowl reverse direction switch.

| Shipping Information | | | |
|----------------------|--------------------|--------------------|-----------------------------------------------|
| Model | Net Weight | Shipping Weight | Overall Dimensions |
| SL160 | 1,521 lbs. (690Kg) | 1,631 lbs. (740Kg) | 69" (176cm) H x 41" (105cm) W x 63" (160cm) D |
| SL200 | 1,653 lbs. (750Kg) | 1,764 lbs. (800Kg) | 69" (176cm) H x 51" (130cm) W x 79" (200cm) D |
| SL280 | 1,830 lbs. (830Kg) | 1,940 lbs. (880Kg) | 69" (176cm) H x 55" (140cm) W x 87" (220cm) D |

*The weight and dimensions of the pallet are included in the weight and dimensions above.



Univex Corporation
www.Univexcorp.com

3 Old Rockingham Rd
Salem, NH 03079
United States of America

INTL TEL: (800)258-6358
TEL: (603)893-6191
INTL FAX: (800)356-5614
FAX: (603)893-1249