



CYCLONE SERIES FULL-SIZE ELECTRIC CONVECTION OVENS

SERIES: BCO-E



Bakers Pride® BCO-E series convection ovens feature single and double-stacked models with electric operation. Independent doors are fully insulated and feature cool-touch handles. The two-speed fan has a 900 rpm low-speed setting for precise cooking. The models in this series are serviceable from the front and include stainless steel front, top, sides, and doors. The lighted oven chamber features porcelain enamel interiors over heavy-gauge steel, eleven-position removable rack guides with 1.62" spacing, and five chrome plated racks. Standard rotary controls are simple to use and include a cool-down function and continuous-ring timer.

FEATURES AT A GLANCE

- Electric operation 10.5 kW
- Electronic temperature control
- 150–550°F (65–287°C) temperature range
- 60/40 split independent doors with dual handles
- Stainless steel front, top, sides, doors, and door seals
- Double-pane, thermal glass door windows
- Interior oven light
- 60-minute, continuous-ring timer
- Two-speed, 1/4 hp fan motor with cool-down mode and low-speed setting (900 rpm)
- Porcelain enamel oven interior
- Eleven-position removable rack guides with 1.62" spacing
- Five heavy-duty, chrome-plated wire racks with stop
- Black-powder-coated legs with adjustable bullet feet
- Front-mounted, hinged control panel
- Units are hardwired; plug and cord not included
- One-year limited warranty

OPTIONS & ACCESSORIES


- 30" (838 mm) stainless steel legs and shelf
- Stainless steel legs with casters and shelf
- Rack stand with rack guides
- Stainless steel perf back
- Direct vent flue
- Oven racks
- Stacking brackets
- Gas conversion kits
- Stacking kit with 6" legs
- Stacking kit with casters
- 25" (635 mm) legs with 3" adjustable feet
- 25" legs with casters



CYCLONE SERIES FULL-SIZE ELECTRIC CONVECTION OVENS

SERIES: BCO-E

EQUIPMENT DIMENSIONS

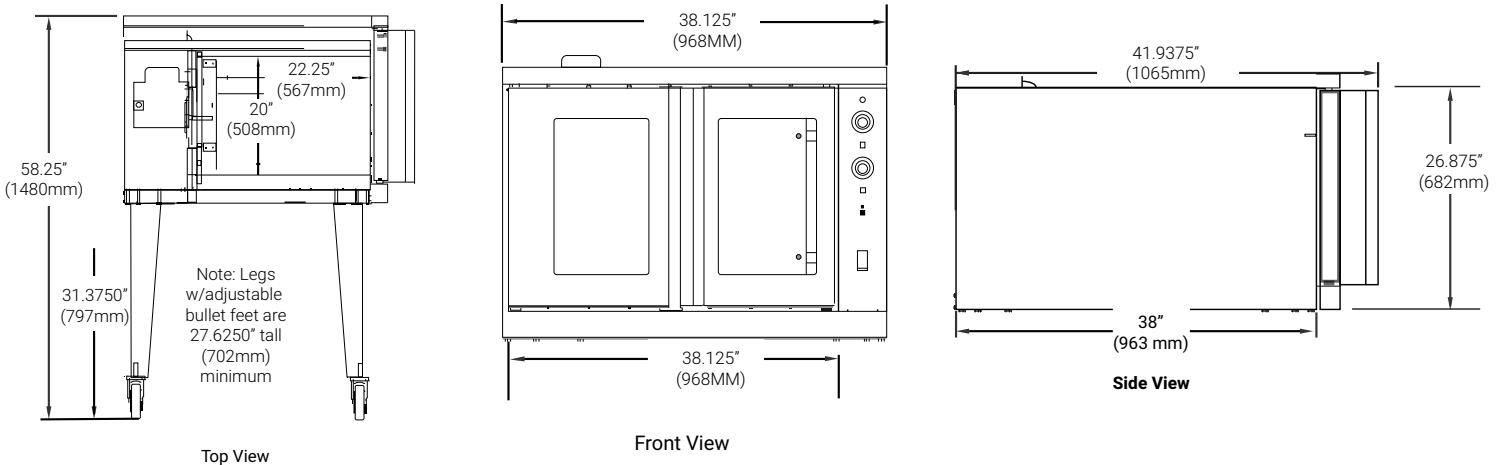

MECHANICAL SPECIFICATIONS

| Model # | Overall Dim (W x H x D)* | Interior Dim (W x H x D) | Carton Dim (W x H x D) | Cubic Feet | Cubic Meter | Ship Wt. |
|---------|---|---|--|------------|-------------|----------------|
| BCO-E1 | 38.12" x 58.25" x 41.93" (968 x 1480 x 1065) | 29" x 20" x 22.25" (737 x 508 x 567) | 43" x 34" x 48.25" (1092 x 864 x 1226) | 45.93 | 1.29 | 514 (234kg) |
| BCO-E2 | 38.12" x 62" x 41.93" (968 x 1575 x 1065) | 29" x 20" x 22.25" (737 x 508 x 567) | Shipped in two boxes as above specifications | | | |

*Height includes legs

POWER SUPPLY

| Model # | Watts | Voltage | Phase | Amps | | | Fan 50HZ | | Fan 60HZ | |
|---------|-------|---------|-------|------|----|----|----------|----------|----------|----------|
| | | | | L1 | L2 | L3 | RPM-low | RPM-high | RPM-low | RPM-high |
| BCO-E1 | 10.5 | 208 | 3 | 30 | 30 | 28 | 748 | 1425 | 850 | 1725 |
| BCO-E1 | 10.5 | 220/240 | 3 | 26 | 26 | 24 | 748 | 1425 | 850 | 1725 |
| BCO-E1 | 10.5 | 208 | 1 | 48 | 48 | | 748 | 1425 | 850 | 1725 |
| BCO-E1 | 10.5 | 220/240 | 1 | 44 | 44 | | 748 | 1425 | 850 | 1725 |

REQUIRED CLEARANCES

| | Vent Hood | Direct Venting |
|-------|------------|----------------|
| Left | 1" (25 mm) | N/A |
| Right | 1" (25 mm) | N/A |
| Back | 3" (76 mm) | N/A |

Bakers Pride reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.



Freight Class: 110
FOB: Allen, 75013

