



Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

UNDERCOUNTER FREEZERS

MODEL: MCF27UHC MCF48UHC MCF60UHC



MCF27UHC



MCF48UHC



MCF60UHC


Maxx Cold Undercounter Refrigerators are constructed of stainless steel and polyurethane insulation for optimum temperature control and easy maintenance. Available in 27", 48" and 60" widths, each model features recessed door handles and PE coated wire shelving with storage space for full size sheet pans.

FEATURES AND CONSTRUCTION

- Durable, easy to clean stainless steel exterior and interior
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Four (4) 6." swivel casters
- Automatic defrost system
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Self-closing doors
- Polyurethane insulated doors and walls
- Accomodates full-size sheet pans

ELECTRIC

115V / 60Hz / 1Ph
(230V / 50-60Hz / 1Ph is available as an option)
6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

TEMPERATURE

Holding temperature-10°F to 10°F (-23°C to -12°C)

- Efficient forced-air refrigeration system with two fans

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471




Zero Ozone Depletion Potential

MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at
TechnicalServices@TheLegacyCompanies.com or 877.368.2797



MAXX COLD UNDERCOUNTER FREEZERS

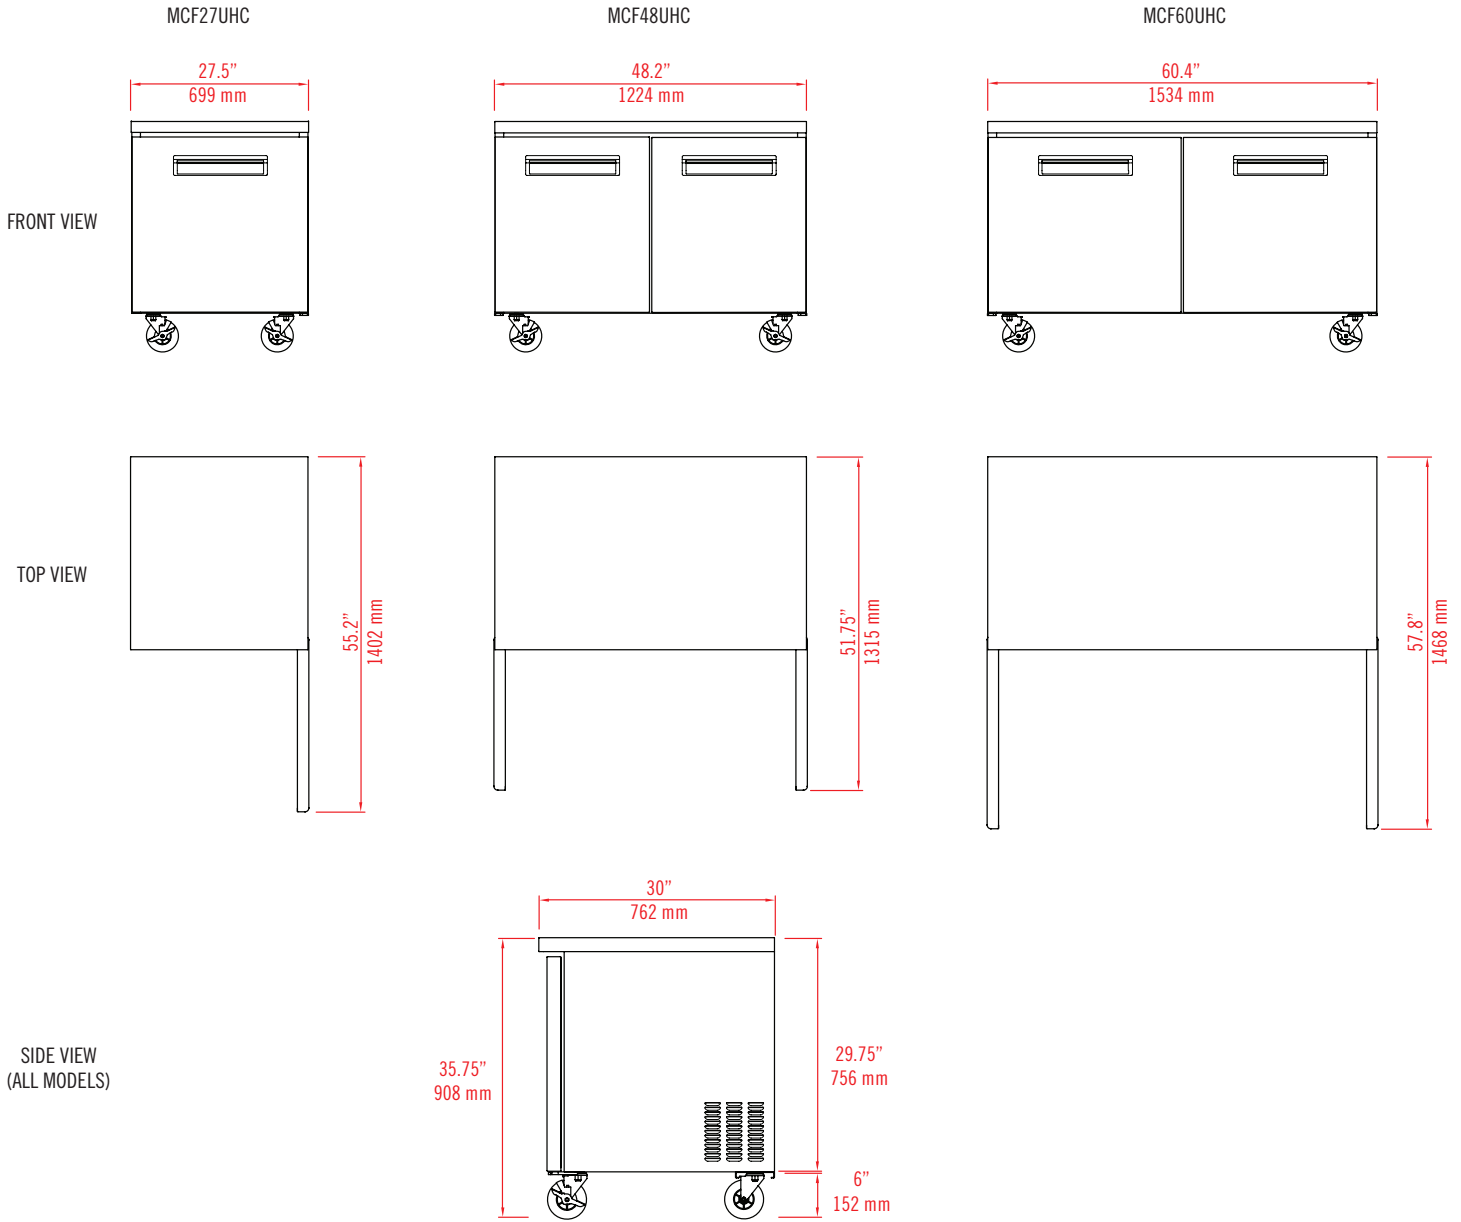

SIDE VIEW
(ALL MODELS)

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	HP	UNIT WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
MCF27UHC	27.5" x 30" x 35.75" (699 x 762 x 908 mm)	23.7" x 20.2" x 19.7" (602 x 513 x 500 mm)	5.9 Cu Ft (167 L)	-10°F to 10°F (-23°C to -12°C)	3.5A	3/8	185 lbs (84 kg)	R-290a 1.41oz (40 g)	1 / 1	115V / 60Hz / 1Ph
MCF48UHC	48.2" x 30" x 35.75" (1224 x 762 x 908 mm)	44.7" x 20.2" x 19.7" (1135 x 513 x 500 mm)	11.18 Cu Ft (317 L)	-10°F to 10°F (-23°C to -12°C)	7.0A	1/2	264 lbs (120 kg)	R-290a 1.87oz (53 g)	2 / 2	115V / 60Hz / 1Ph
MCF60UHC	60.4" x 30" x 35.75" (1534 x 762 x 908 mm)	56.7" x 20.2" x 19.7" (1440 x 513 x 500 mm)	14.28 Cu Ft (404 L)	-10°F to 10°F (-23°C to -12°C)	7.0A	1/2	308 lbs (140 kg)	R-290a 1.98 oz (56 g)	2 / 2	115V / 60Hz / 1Ph

INSTALLATION

- Shorter caster options are available to lower the overall height of the unit to satisfy ADA or other low profile requirements