

## SANDWICH PREP STATIONS

MODEL:  MCR27SHC  MCR48SHC  MCR60SHC



MCR27SHC



MCR48SHC



MCR60SHC


Maxx Cold Sandwich Stations are designed for performance and durability with accessibility to allow for quick and easy preparation of sandwiches, salads and more. A high quality stainless steel exterior and interior allows for easy cleaning and a heavy duty stainless steel insulated hood allows easy access to the ingredients while keeping the contents cool and fresh.

### FEATURES AND CONSTRUCTION

- Durable, easy to clean stainless steel exterior and interior
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Four (4) 6" swivel casters
- Automatic defrost system
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Equipped with a food grade plastic cutting board and full set of clip-on divider bars and plastic pans
- Self-closing doors
- Polyurethane insulated doors and walls
- Accommodates full-size sheet pans

### ELECTRIC

115V / 60Hz / 1Ph  
 (230V / 50-60Hz / 1Ph is available as an option)  
 6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

### 3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Zero Ozone Depletion Potential

### MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at  
 TechnicalServices@TheLegacyCompanies.com or 877.368.2797


### TEMPERATURE

Holding temperature ..... 33°F to 41°F (1°C to 5°C)

- Efficient forced-air refrigeration system with two fans



# MAXX COLD SANDWICH PREP STATIONS

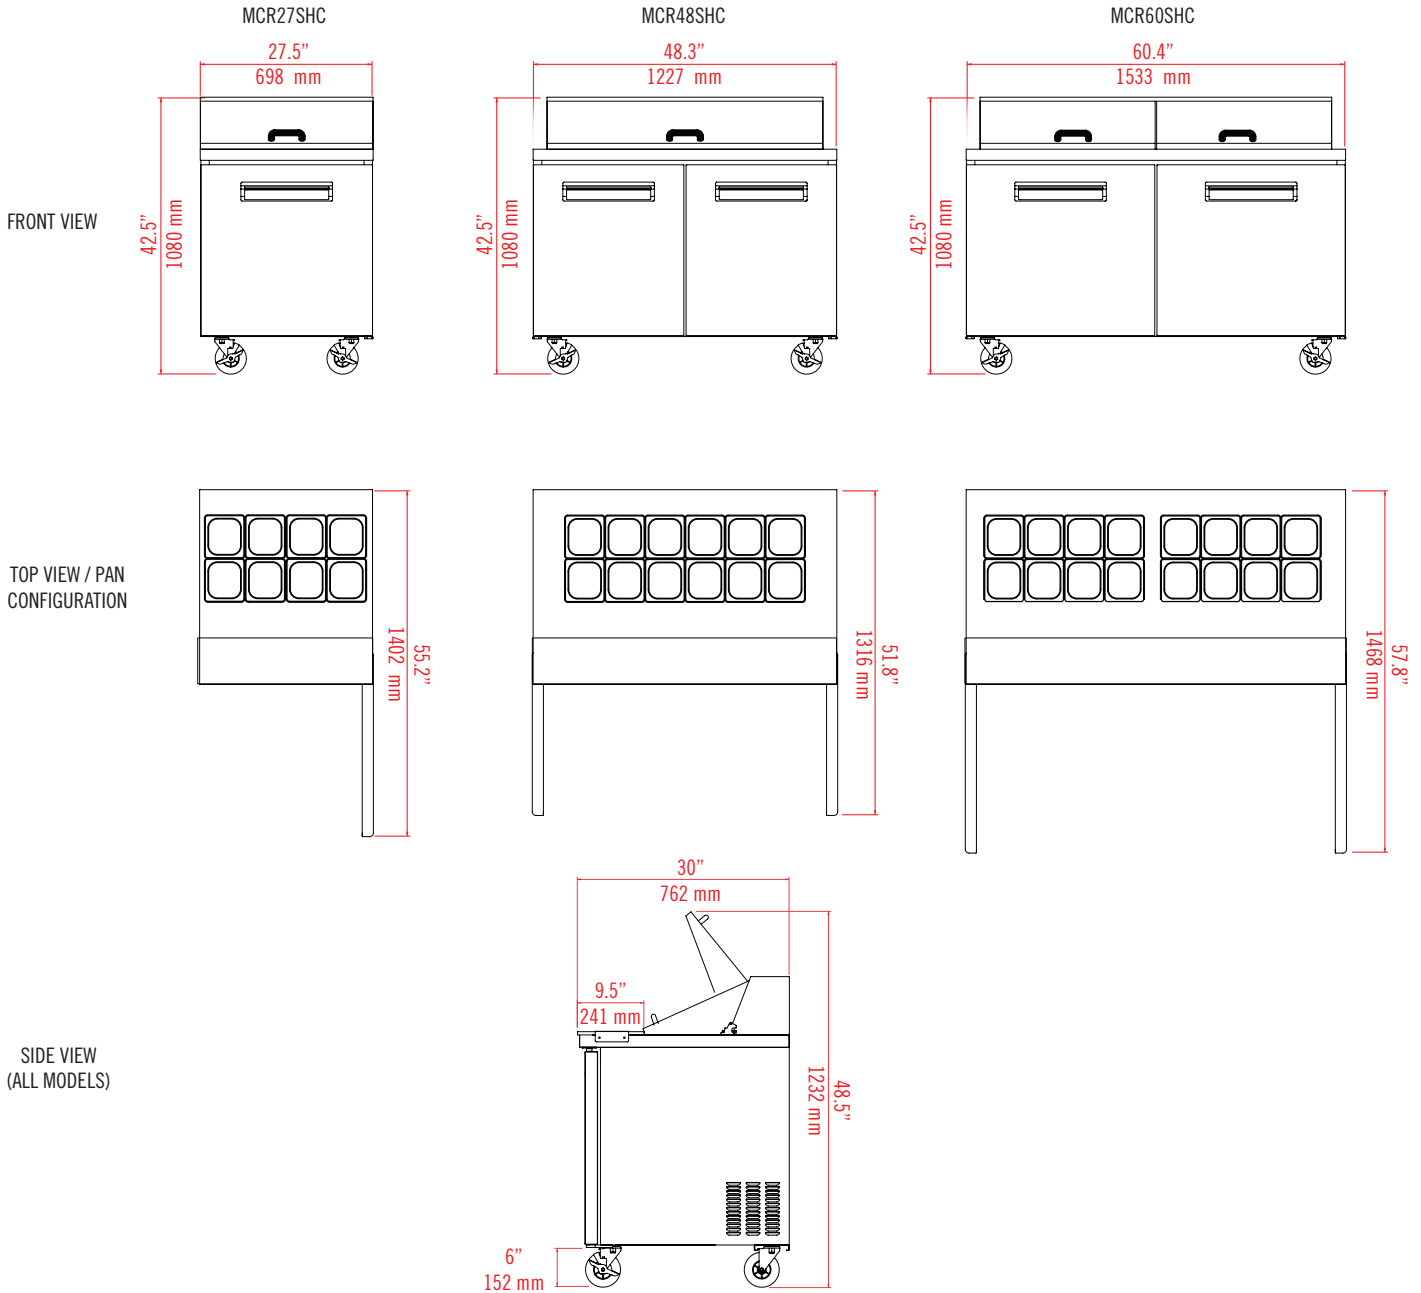

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	HP	UNIT WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	PANS (1/6)	ELECTRICAL
MCR27SHC	27.5" x 30" x 42.5" (699 x 762 x 1080 mm)	23.7" x 20.2" x 19.7" (602 x 513 x 500 mm)	7 Cu Ft (198 L)	33°F to 41°F (1°C to 5°C)	3.5A	3/8	198 lbs (90 kg)	R-290a 0.88 oz (25 g)	1 / 1	8	115V / 60Hz / 1Ph
MCR48SHC	48.3" x 30" x 42.5" (1227 x 762 x 1080 mm)	44.7" x 20.2" x 19.7" (1135 x 513 x 500 mm)	13 Cu Ft (386 L)	33°F to 41°F (1°C to 5°C)	3.5A	3/8	284 lbs (129 kg)	R-290a 1.13 oz (32 g)	2 / 2	12	115V / 60Hz / 1Ph
MCR60SHC	60.4" x 30" x 42.5" (1533 x 762 x 1080 mm)	56.7" x 20.2" x 19.7" (1440 x 513 x 500 mm)	16 Cu Ft (453 L)	33°F to 41°F (1°C to 5°C)	3.5A	3/8	316 lbs (143 kg)	R-290a 1.13 oz (32 g)	2 / 2	16	115V / 60Hz / 1Ph

## INSTALLATION

- Shorter caster options are available to lower the overall height of the unit to satisfy ADA or other low profile requirements