

COUNTERTOP MERCHANDISER REFRIGERATORS - GLASS DOOR

MODEL: MXM1-2RHC MXM1-2.5RHC MXM1-3.5RHC MXM1-4RHC



MXM1-2RHC



MXM1-2.5RHC



MXM1-3.5RHC



MXM1-4RHC

Maxx Cold Countertop Merchandiser Refrigerators are designed with a glass door to enhance product display. These energy efficient units include simple to use, programmable solid state digital controls that deliver accurate temperature regulation to preserve freshness and prolong product shelf life.

FEATURES AND CONSTRUCTION

- Constructed of white painted steel exterior and ABS interior
- Multi-pane, self-closing glass door with magnetic compression gaskets
- Interior LED lighting
- Bottom mounted compressor
- Adjustable heavy-duty PE-coated wire shelves
- Four (4) adjustable leveling feet
- Digital controls with LED temperature display
- Manual defrost cycle
- Provided with lock and key set for security
- Foamed urethane insulation to improve temperature regulation
- Equipped with integrated condensate evaporator therefore no drain line connection is needed

NOMINAL STORAGE CAPACITY

MXM1-2RHC.....	2.1 Cu Ft (59.5 L)
MXM1-2.5RHC.....	2.6 Cu Ft (73.5 L)
MXM1-3.5RHC.....	3.5 Cu Ft (102 L)
MXM1-4RHC.....	4.2 Cu Ft (119 L)


TEMPERATURE

Holding temperature 33°F to 41°F (1°C to 5°C)

- Digitally controlled refrigeration system maintains optimum storage temperature

ELECTRIC

115V / 60Hz / 1Ph
 (230V / 50-60Hz / 1Ph is available as an option)
 6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471




EPA Compliant



DOE 2017 Compliant

MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at
 TechnicalServices@TheLegacyCompanies.com or 877.368.2797

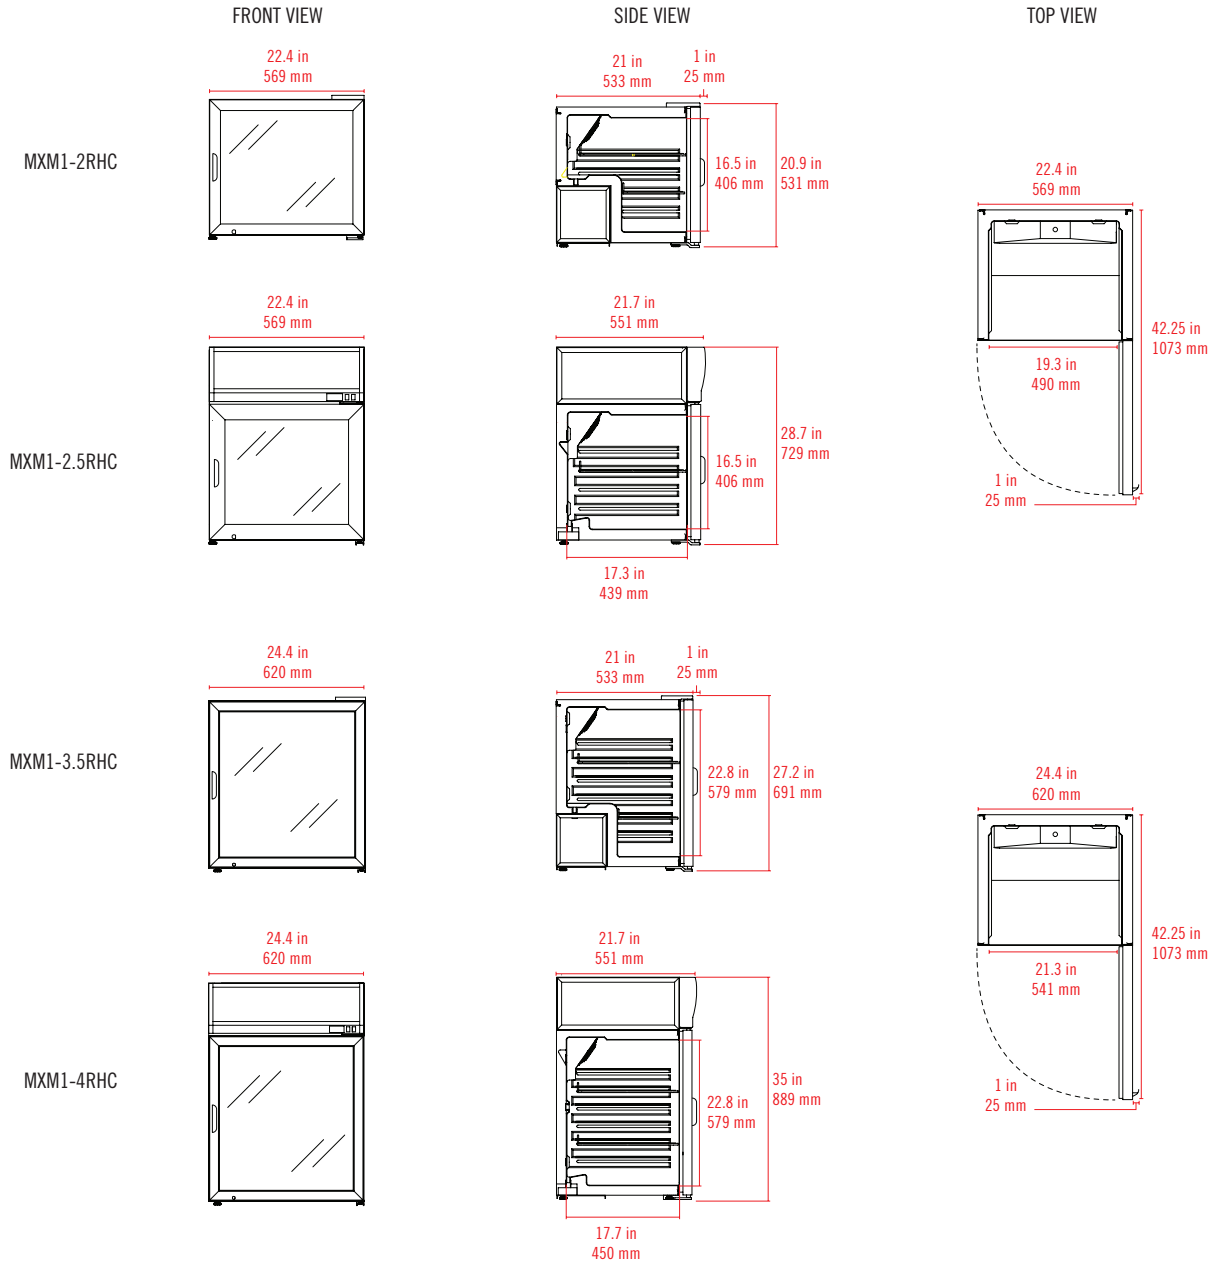

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NOMINAL CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	UNIT WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
MXM1-2RHC	22.4" x 22" x 20.9" (569 x 558 x 531 mm)	19.3" x 17.3" x 16.5" (490 x 439 x 406 mm)	2.1 Cu Ft (59.5 L)	33°F to 41°F (1°C to 5°C)	1.2A	94.8 lbs (43 kg)	R-600A 1.41 oz (40 g)	1 / 2	115V / 60Hz / 1Ph
MXM1-2.5RHC	22.4" x 21.7" x 28.7" (569 x 551 x 729 mm)	19.3" x 17.3" x 16.5" (490 x 439 x 406 mm)	2.6 Cu Ft (73.5 L)	33°F to 41°F (1°C to 5°C)	1.2A	106.3 lbs (48 kg)	R-600A 1.41 oz (40 g)	1 / 2	115V / 60Hz / 1Ph
MXM1-3.5RHC	24.4" x 22" x 27.2" (620 x 558 x 691 mm)	21.3" x 17.7" x 22.8" (541 x 450 x 579 mm)	3.5 Cu Ft (102 L)	33°F to 41°F (1°C to 5°C)	1.2A	117 lbs (53 kg)	R-600A 1.76 oz (50 g)	1 / 3	115V / 60Hz / 1Ph
MXM1-4RHC	24.4" x 21.7" x 35" (620 x 551 x 889 mm)	21.3" x 17.7" x 22.8" (541 x 450 x 579 mm)	4.2 Cu Ft (119 L)	33°F to 41°F (1°C to 5°C)	1.2A	129 lbs (59 kg)	R-600A 1.7 oz (48 g)	1 / 3	115V / 60Hz / 1Ph

INSTALLATION

- Units are equipped with leveling feet.