

MEGATOP PREP UNITS

MODEL: MCR27MHC MCR48MHC MCR60MHC




Maxx Cold Megatops feature expanded pan capacity and are designed for performance and durability with accessibility to allow for quick and easy preparation of sandwiches, salads and more. A high quality stainless steel exterior and interior allows for easy cleaning and a heavy duty stainless steel insulated hood allows easy access to the ingredients while keeping the contents cool and fresh.

FEATURES AND CONSTRUCTION

- Durable, easy to clean stainless steel exterior and interior
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Four (4) 6" swivel casters
- Automatic defrost system
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Equipped with a food grade plastic cutting board and full set of clip-on divider bars and plastic pans
- Self-closing doors
- Polyurethane insulated doors and walls
- Accommodates full-size sheet pans

ELECTRIC

115V / 60Hz / 1Ph
 (230V / 50-60Hz / 1Ph is available as an option)
 6' (2m) NEMA 5-15P cord set included



3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Zero Ozone Depletion Potential

MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at
 TechnicalServices@TheLegacyCompanies.com or 877.368.2797


TEMPERATURE

Holding temperature 33°F to 41°F (1°C to 5°C)

- Efficient forced-air refrigeration system with two fans



MAXX COLD MEGATOP PREP UNITS

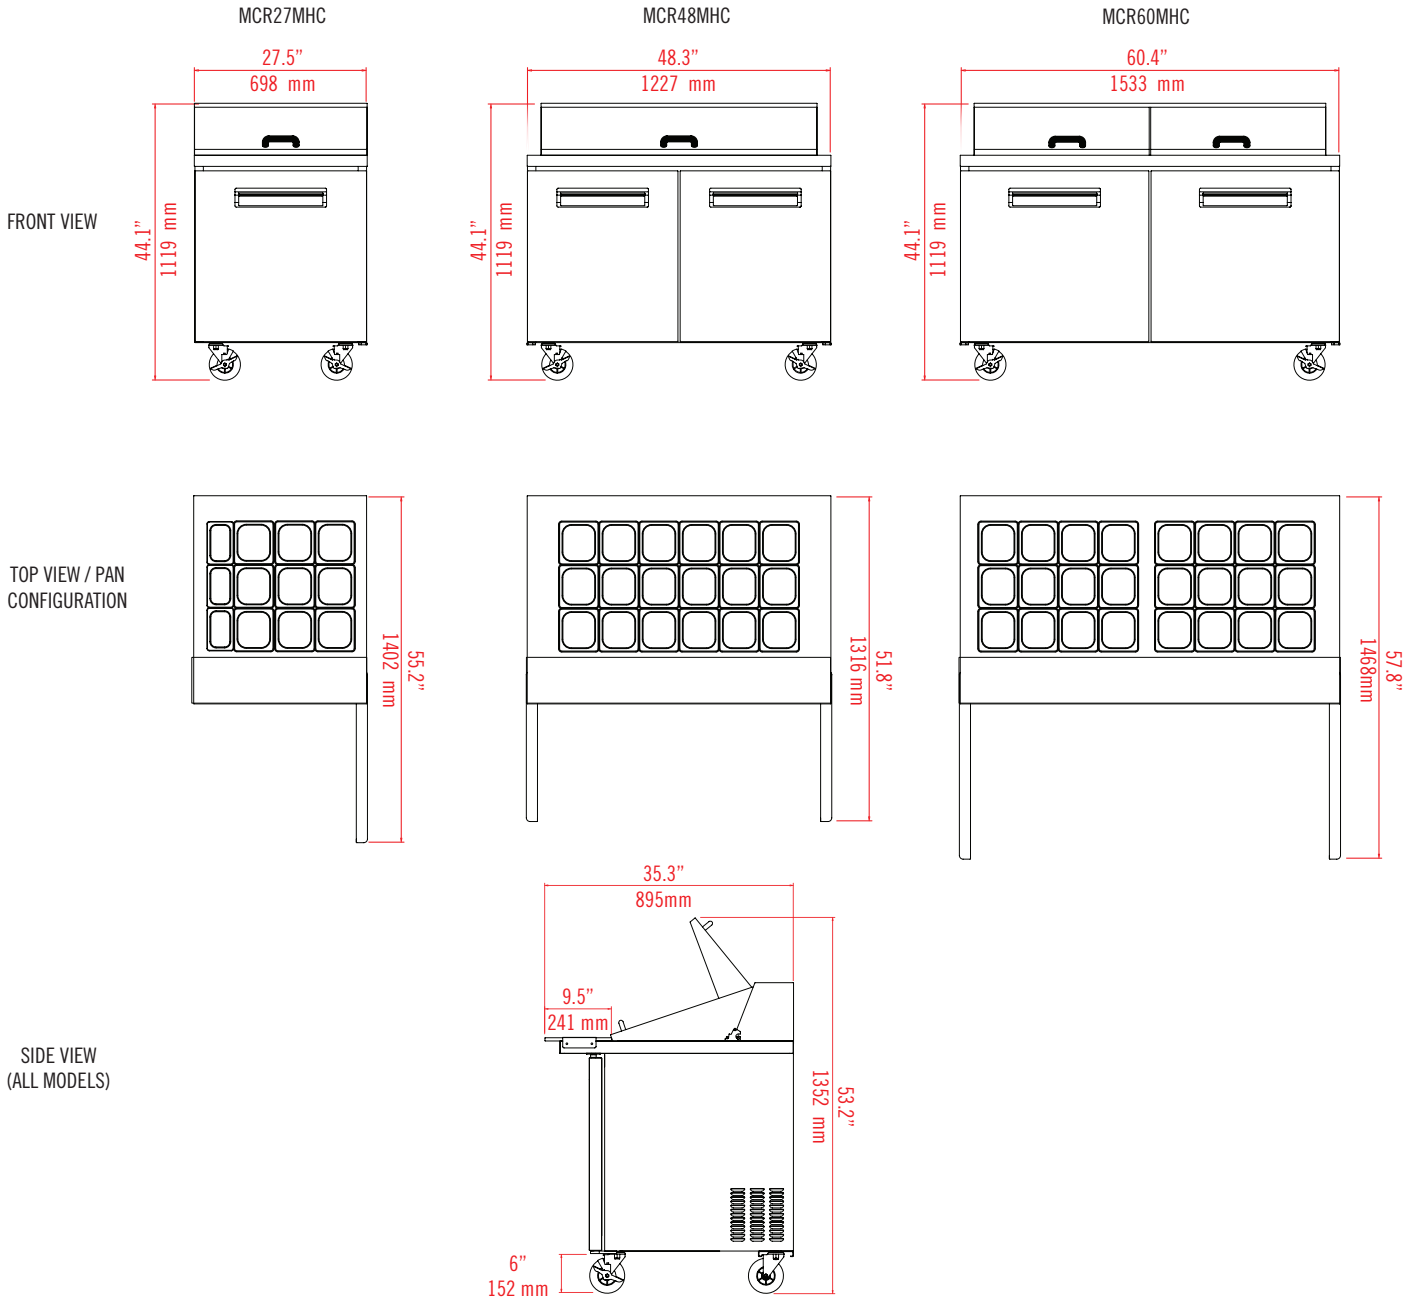

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	HP	UNIT WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	PANS (1/6)	ELECTRICAL
MCR27MHC	27.5" x 30" x 44.1" (699 x 762 x 1119 mm)	23.7" x 20.2" x 19.7" (602 x 513 x 500 mm)	7 Cu Ft (198 L)	33°F to 41°F (1°C to 5°C)	3.5A	3/8	223 lbs (101 kg)	R-290a 1.06 oz (30 g)	1 / 1	9	115V / 60Hz / 1Ph
MCR48MHC	48.3" x 30" x 44.1" (1227 x 762 x 1119 mm)	44.7" x 20.2" x 19.7" (1135 x 513 x 500 mm)	13 Cu Ft (386 L)	33°F to 41°F (1°C to 5°C)	3.5A	3/8	318 lbs (144 kg)	R-290a 1.13 oz (32 g)	2 / 2	18	115V / 60Hz / 1Ph
MCR60MHC	60.4" x 30" x 44.1" (1533 x 762 x 1119 mm)	56.7" x 20.2" x 19.7" (1440 x 513 x 500 mm)	16 Cu Ft (453 L)	33°F to 41°F (1°C to 5°C)	3.5A	3/8	362 lbs (164 kg)	R-290a 1.23 oz (35 g)	2 / 2	24	115V / 60Hz / 1Ph

INSTALLATION

- Shorter caster options are available to lower the overall height of the unit to satisfy ADA or other low profile requirements

02/25/20

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.