

## SOLID DOOR BACK BAR COOLERS

MODEL:  MXBB60HC  MXBB70HC  MXBB90HC



MXBB60HC



MXBB70HC



MXBB90HC


Back Bar Coolers are ideal to store bottled or canned beverages at the right serving temperature. The stainless steel interior houses a LED light to illuminate the stored contents. Units are designed for either built-in, stationary, or mobile applications. Coolers are available in over 13, 14 and 25 cu. ft of interior storage and feature multipane glass doors, casters and wire shelves.

### FEATURES AND CONSTRUCTION

- Black painted steel exterior
- Stainless steel countertop and interior
- Solid doors with easy to grip recessed handles
- Door locks for added security and sanitation
- Equipped with four (4) or six (6) PVC coated wire shelves
- Equipped with four (4) or six (6) 5" swivel casters (2 or 3 with brakes)
- Solid state digital controls with LED temperature display
- LED lighting
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors
- Front-breathing refrigeration system

### ELECTRIC

115V / 60Hz / 1Ph  
 (230V / 50-60Hz / 1Ph is available as an option)  
 6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

### 3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Zero Ozone Depletion Potential



DOE 2017 Compliant

### NET STORAGE CAPACITY (Cu Ft (L) / CANS / BOTTLES) -

MXBB60HC.....	13.8 Cu Ft (390 L) / 528 / 240
MXBB70HC.....	14.5 Cu Ft (410 L) / 775 / 372
MXBB90HC.....	25.3 Cu Ft (716 L) / 1252 / 570

### TEMPERATURE

Holding temperature ..... 33°F to 41°F (1°C to 5°C)

- Solid-state controls and forced-air system deliver consistent, easily adjustable temperature performance


### MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at  
 TechnicalServices@TheLegacyCompanies.com or 877.368.2797

MXBB60HC

MXBB70HC

MXBB90HC

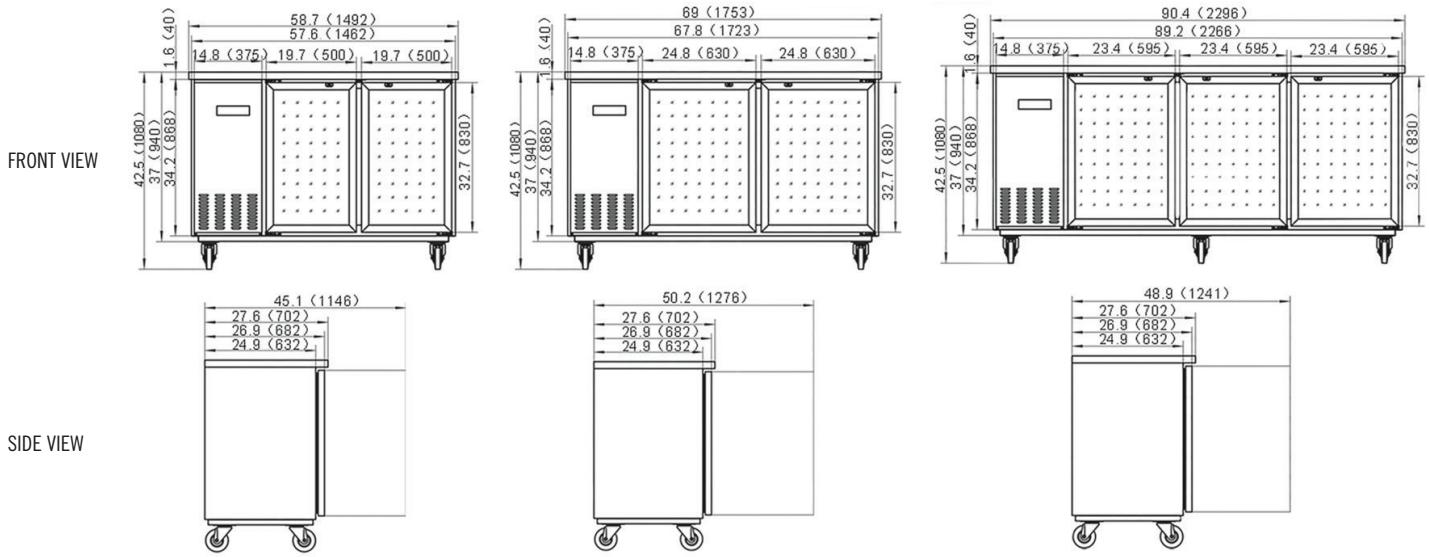

MODEL	EXTERNAL DIMENSIONS	NET CAPACITY	CAN / BOTTLE CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
MXBB60HC	58.7" x 27.6" x 42.5" 1492 x 702 x 1080 mm	13.8 Cu Ft (390 L)	528 Cans 240 Bottles	33°F to 41°F (1°C to 5°C)	3A	302 lb 137 kg	R-290a 3.88 oz (110 g)	2 / 4	115V / 60Hz / 1Ph
MXBB70HC	69.2" x 27.6" x 42.5" (1753 x 702 x 1080 mm)	14.5 Cu Ft (410 L)	775 Cans 352 Bottles	33°F to 41°F (1°C to 5°C)	3A	412 lb 187 kg	R-290a 3.88 oz (110 g)	2 / 4	115V / 60Hz / 1Ph
MXBB90HC	90.4" x 27.6" x 42.5" (2296 x 702 x 1080 mm)	25.3 Cu Ft (716 L)	1254 Cans 570 Bottles	33°F to 41°F (1°C to 5°C)	3A	408 lb 185 kg	R-290a 4.59 oz (110 g)	3 / 6	115V / 60Hz / 1Ph

## INSTALLATION

- Shorter caster options are available to lower the overall height of the unit to satisfy ADA or other low profile requirements