



Project Name: _____
Location: _____
Item #: _____ Qty: _____
Model: _____

SELF-CONTAINED INDOOR ICE MACHINES

MODEL: ☐ MIM50 ☐ MIM50V



MIM50



MIM50V

The Maxx Ice MIM50 series of indoor ice machines produce up to 60 pounds of ice per day (under ideal conditions). These stylish, durable and easy to install models are perfect for any freestanding or built-in application.

FEATURES AND CONSTRUCTION

- Stainless steel / black painted steel (MIM50) or black painted steel (MIM50V) exterior
- Air-cooled compressor
- Solid state controls
- Built-in self cleaning mode
- Automatic overflow prevention
- 25 lb storage bin
- Field reversible door
- Adjustable durable feet
- Includes ice scoop and tubing for supply and drain lines

DAILY ICE PRODUCTION

Air Temp 70°F (21°C) / Water Temp 50°F (10°C)

MIM50 60 lbs (27.2 kg)

MIM50V 50 lbs (22.7 kg)


Air Temp 90°F (32°C) / Water Temp 70°F (21°C)

MIM50 50 lbs (22.7 kg)

MIM50V 50 lbs (22.7 kg)

ELECTRIC

115V / 60Hz / 1Ph
(230V / 50-60Hz / 1Ph is available as an option)
6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

3RD PARTY APPROVALS



Certified to ANSI NSF 12



Certified to ANSI UL 563



DOE 2018 Compliant



Meets Energy Star Guidelines



Zero Ozone Depletion Potential

MAXX ICE WARRANTY (USA / CANADA)

Contact Maxx Ice for warranty statement at
TechnicalServices@TheLegacyCompanies.com or 877.368.2797

ICE BIN STORAGE CAPACITY

MIM50 25 lbs (11 kg)

MIM50V 25 lbs (11 kg)

OPERATING REQUIREMENTS

Ambient Air Temperature Range..... 50° to 100°F (10° to 38°C)

Water Temperature Range 41° to 90°F (5° to 32°C)

Water Usage per 100 lbs of ice..... 13.8 Gallons (52.2L)

Water Supply Line Connection 1/4" O.D. Compression

Water Pressure Range:

Min PSI 15 Max PSI 75*

Min Bar 1.0 Max Bar 5.5

*Above 75 PSI requires a regulator

Energy Consumption per 100 lbs of ice:

MIM50 10.1 kWh/100 lbs

MIM50V 10.1 kWh/100 lbs




MAXX ICE


SELF-CONTAINED INDOOR ICE MACHINES

MIM50


TOP VIEW

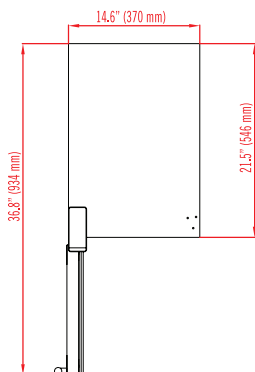

FRONT VIEW

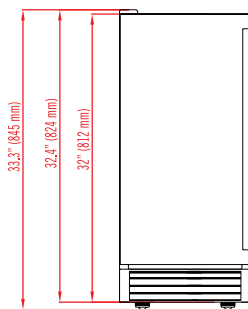


SIDE VIEW

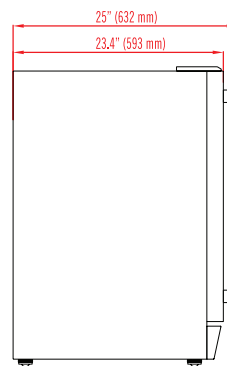


MIM50V


TOP VIEW

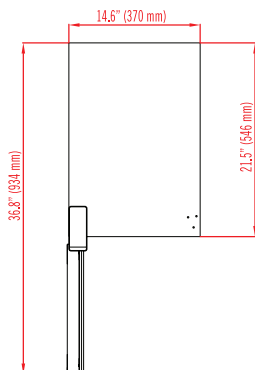


FRONT VIEW

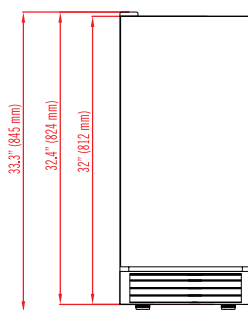


SIDE VIEW

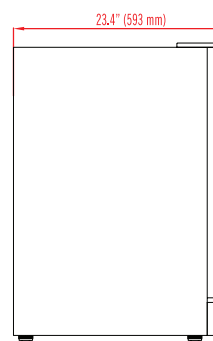

REAR VIEW
(ALL MODELS)

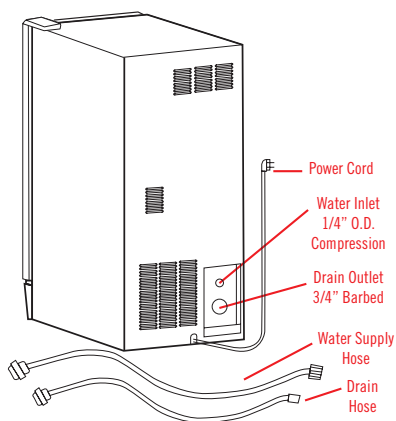

FULL DICE CUBE (ACTUAL SIZE)

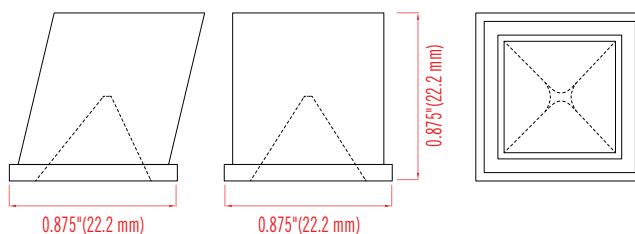

MODEL	EXTERNAL DIMENSIONS	DAILY ICE PRODUCTION (70°F Air / 50°F Water)	ICE BIN STORAGE CAPACITY	NET WEIGHT / SHIPPING WEIGHT	AMP DRAW (MAKING / HARVESTING)	REFRIGERANT AND CHARGE SIZE	ELECTRICAL
MIM50	14.6" x 25" x 33.3" (370 x 632 x 845 mm)	60 lbs (27.2 kg)	25 lbs (11 kg)	84 lbs (38 kg) 93 lbs (42 kg)	3A / 3.6A	R-134a 3.88oz (110g)	115V / 60Hz / 1Ph
MIM50V	14.6" x 23.4" x 33.3" (370 x 593 x 845 mm)	50 lbs (22.7 kg)	25 lbs (11 kg)	84 lbs (38 kg) 93 lbs (42 kg)	3A / 4A	R-134a 3.88oz (110g)	115V / 60Hz / 1Ph

INSTALLATION

- A clearance of 2" from the wall is recommended to promote adequate cooling air circulation
- A gravity drain line is required to install this ice machine
- For optimal performance, the use of a water filter is recommended

09/28/20

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.