



•16'x16' Square basket glasswasher;

- Stainless steel construction 18/10AISI 304;
- Wash cycle time: 2 minutes;
- Wash and rinse temperature thermometers;
- Stainless steel lower rotating wash arms;
- Stainless steel lower rotating rinsing and upper fixed;
- Extractable control panel for an easy maintenance;
- Rinse aid dispenser;
- Detergent pump,
- Automatic tank loading;
- Door opening safety device;
- Thermocontrol: device which guarantees the selected temperature for every rinsing cycle even in case of non-stop work;
- Security thermostat;
- Gravity drain;
- Certifications: UL, UL Sanitation;



SIZE:
18,11 x 19,92 x H30,71 inch

Cycle period: 2 minutes

Capacity per hour:
Baskets/H 30



DSP3

Accessories:


- 2 baskets for glasses;
- 1 soucers insert;
- 2 cutlery containers;

OPTIONS,

- Stainless steel base H18,50 inch,

Specifications	DSP3	
VOLTAGE	208 V1ph 60Hz	V
WASHING PUMP	210	W
WASH TANK ELEMENTS	1000	W
RINSE TANK ELEMENTS	3000	W
TOTAL RATING	3200	W
MAX CURRENT INTENSITY	16	A
PLATES CLEARANCE	11,81	inch
WORK HEIGHT	12,40	inch
TANK CAPACITY	20	Lt.
BOILER CAPACITY	3	Lt.
PUMP DELIVERY	160	Lt./min
WATER CONNECTION	131	°F
WATER CONSUMPTION PER CYCLE	2,00	Lt.
WATER CONSUMPTION PER HOUR	60	Lt.
WATER PRESSURE	20±5	psi
WATER HARDNESS	5 ÷ 10	TH(°F)
RINSING WATER TEMPERATURE	179 ÷ 194	°F
WATER INLET	3/4"	"G
WATER OUTLET	1"1/4	"G
NET WEIGHT	35	Kg
GROSS WEIGHT	40	Kg
PACKING SIZE	/19,68xL22,05xH31,00	inch
NOISE LEVEL	<70	dB(A)

The manufacturer reserves the right to make modifications of materials and models without warning.

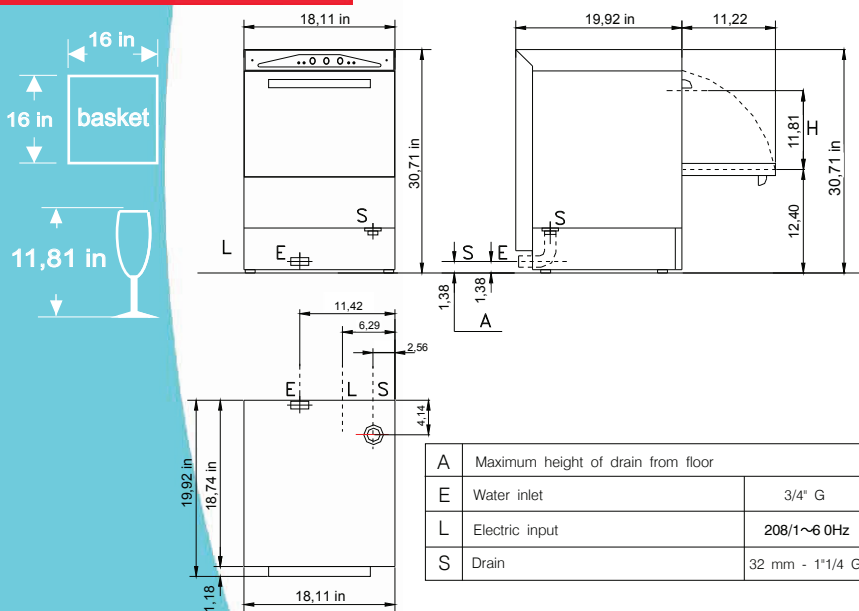

Z.I. Via Italia, 6 - 26855 Lodivecchio (LO) Italy
Tel. (0371) 753202 - 754248-9 Fax (0371) 752928
www.lamber.com - e-mail: info@lamber.it

COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV
ISO 9001/2000