



## GLASS DOOR MERCHANDISER

DSM-68SR

3-Glass Sliding Door Refrigerator










### TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60Hz  
Refrigerant R290  
Type of Defrost Automatic  
Interior Finish White  
Exterior Finish Black  
Temperature Range °F 33 ~ 40°F  
Compressor Power (HP) 1/2 & 1/4  
Nema Config. NEMA5-20P



### PRODUCT FEATURES

-  The compressor is mounted in the bottom for better heat evaporation.
-  Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
-  Temperature Range 33 ~ 40°F, with auto defrost function, which ensures optimal performance day-in and day-out.
-  R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
-  Interior and canopy LED light with switch on the right side to always show your products at their best
-  High quality coated stainless adjustable shelves prevent peel and rust.
-  Anti-fogging tempered glass door helps ensure a crystal clear view of the interior.



### HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

 1-800-931-8628


@ [info@dukersusa.com](mailto:info@dukersusa.com)

[www.DukersUSA.com](http://www.DukersUSA.com)


# DETAILS & SPECIFICATIONS

## DSM-68SR

Front View

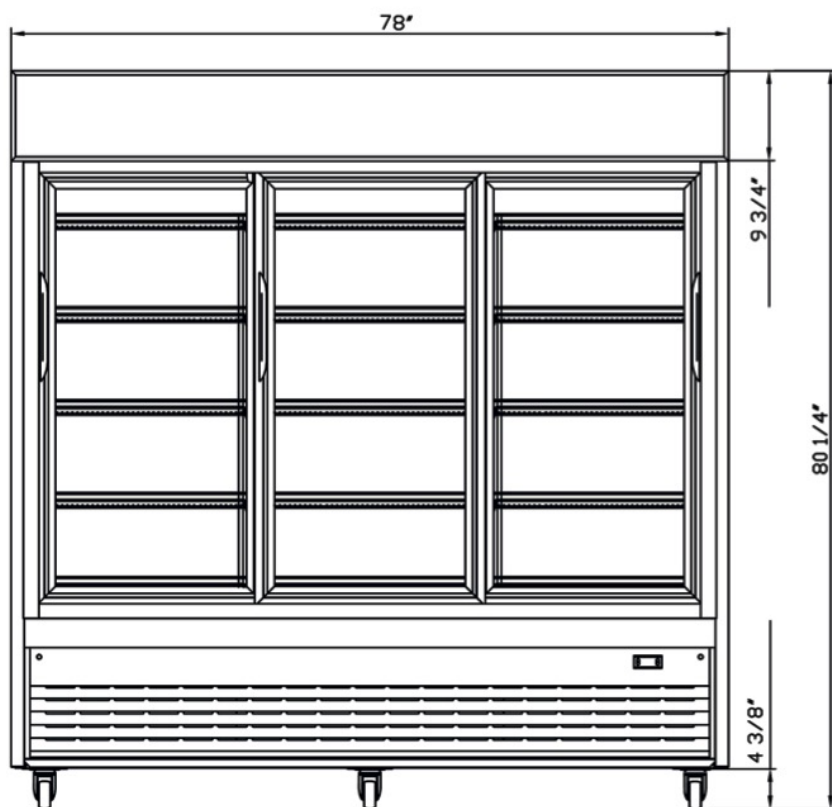

Side View

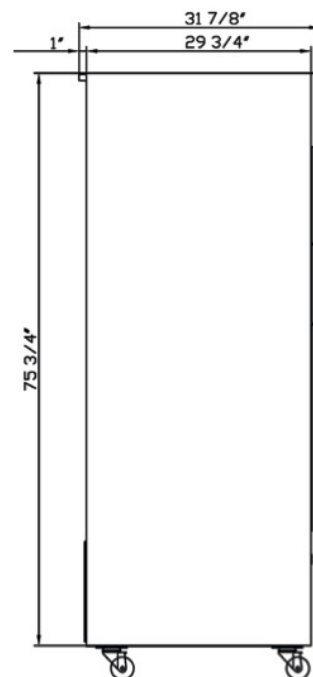

### MODEL DSM-68SR

Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	823W
Total Current	7.40A
Total Capacity	69 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
DSM-68SR	78 x 31 7/8 x 80 3/8	79 1/3 x 33 x 83 1/4	528 lbs	15	14



Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

1-800-931-8628

@ info@dukersusa.com

www.DukersUSA.com