# MODEL: DBB60-H2

## Features and Benefits

* High Resistence to Dust, high quality condenser

* R290 Natrual Refrigerant, promotes faster cool down and efficient energy consumption

* 2-year parts and labor, 5-year compressor warranty

* Stainless steel top, sealed interior floors and rounder cabinet corners for easy cleaning

* Adjustable, heavy duty shelves

## Technical Specifications

| | |
|---|---|
| Voltage/Frequency | 115V 60Hz |
| Refrigerant | R290 |
| Type of Defrost | Automatic |
| Exterior Finish | Stainless steel |
| Interior Finish | Stainless steel |
| Net Weight | 220lbs |
| Total Capacity | 15.24 cu ft |
| Total Current | 2.66A |
| Climatic Category | 4/5 |
| Nema Config. | 5-15P |

| MODEL NO | TEMPERATURE RANGE ( °F ) | EXTERNAL DIMENSION WXDXH(INCHES) | PACKING,CARTON WXDXH(INCHES) | DOOR | 40GP CONTAINER CERTIFICATION |
|---|---|---|---|---|---|
| DBB60-H2 | 33°- 38° F | 61⅛ X 24 X 35⅞ | 63½ X 26⅜ X 43¼ | 2 | 42 |

# BACK BAR COOLER
# SWINGING GLASS DOOR

## MODEL: DBB60-H2

| | |
|---|---|
| Model: | DBB60-H2 |
| Rated Voltage: | 115V AC |
| Rated Frequency: | 60Hz |
| Total Input Power: | 284W |
| Total Current: | 2.66A |
| Total Capacity: | 15.24 cu ft |
| Refrigerant: | R290/3.53oz |
| Climatic Category: | 4/5 |
| Protection Type | I |
| Design pressure | High Side :385PSIG |
| | Low Side:150PSIG |
| Insulation Blowing Gas | C-pentane |
| Net Weight: | 220 lbs |
| NEMA Cofig. | 5-15P |

## STANDARD FEATURES

**SIDE MOUNT COMPRESSOR**
the side mount compressor structure is placed in a easy access area, provides quick and convienient access

**HIGH QUALITY STEEL**
interior and exterior uses high-quality steel minimizes dents, scratches and rust

**HIGH DENSITY POLYURETHANE INSULATION CFC**
free and high density cell foam is Eco-friendly and more energy efficient

**STURDY, CLEAN STAINLESS SHELVING**
high quality coated stainless shelves prevents peel and rust.

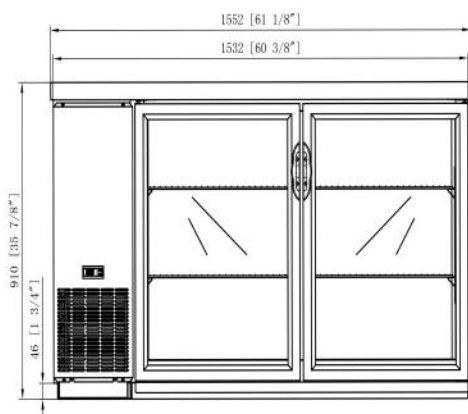**SELF-CLOSING DOOR SYSTEM**
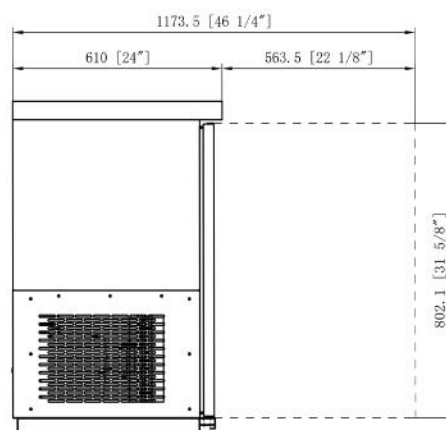door Automatically close at 60°

**REFRIGERATORS OPERATE AT 33 °F - 38 °F**

NEMA 5-15P
115/60/1

## PLAN VIEW

FRONT VIEW

1552 [61 1/8"]
1532 [60 3/8"]
910 [35 7/8"]
46 [1 3/4"]

SIDE VIEW

1173.5 [46 1/4"]
610 [24"]
563.5 [22 1/8"]
802.1 [31 5/8"]