





Available in Black or White finish

# **MODEL**

KGL-CH-(36-48-60)-S

CASE HOLDS 36F TO 40F | FORCED AIR REFRIGERATION. FRONT LOADING | TEMPERED GLASS













SELF CONTAINED	Model	Width (inches)	Capacity Cu.ft	Electrical				Weight lbs		Crate Size (inches)		
				Compressor		Total	NEMA Plug	Net	Ship			
				H.P	Amps	Amps		Weight	Weight	L"	W"	H″
	KGL-CH-36	35,87	4,93	1/2	8,9	17	5-20P	375	452	41.37	41.14	54.92
SE	KGL-CH-48	48,66	6,89	3/4	16	24	Hard-wired	452	536	54.17	41.14	54.92
	KGL-CH-60	59,69	8,58	3/4	16	24	Hard-wired	496	585	65.19	41.14	54.92

### **STANDARD FEATURES**


CFC free injected foam insulation
Silver colored PVC coated steel front panel
PVC coated steel gray interior
Wood laminate covered end panels
LED lighting in canopy and under all shelves
Temperature and defrost regulated by a digital controller
Removable condensate evaporating pan for easy cleaning
Slide out condensing unit on self-contained units

### **OPTIONAL FEATURES**

Stainless steel front panel
Stainless steel base and / or interior
Mirrored side glass
Front panel bumper protector
Acrylic product partitions
Shelf price tag moldings
Casters add 4-3/8" to height
Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

#### **WARRANTY**

One year parts and labor with an additional four years on the compressor (part only)

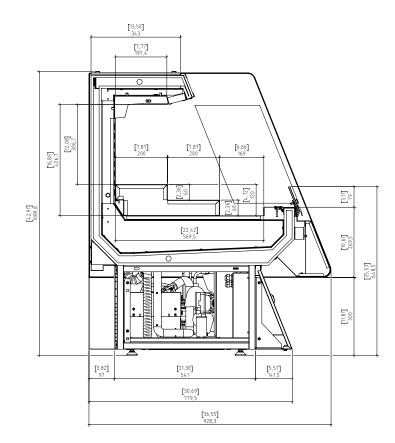

## NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. Ventilation grills at front and back cannot be blocked. B.T.U.'s are cal-culated at 14°F (evaporator) and 90°F (ambient)

Hydra - Kool is a registered trademark of MVP Group Corp. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE





12000 Biscayne Blvd., Suite # 108 Miami, FL, United States 33181 Telephone: 786.600.4687 / Toll Free: 844.218.8477 Fax: 786.661.4100 sales@mvpgroupcorp.com / mvpgroupcorp.com 5659 Royalmount Ave. Montreal, QC, Canada H4P 2P9 Telephone: 514.737.9701 / Toll Free: 888.275.4538 Fax: 514.342.3854 / Toll Free: 877.453.8832